


Specification

- Operating Voltage: 5V DC
- Static Current: 5mA
- Operating Current: 30mA
- Operating Range: 25cm ~ 4.5m
- Resolution: 0.5cm
- Detecting Angle: < 70°
- Operating Temperature: -10 ~ 70°C
- Cable Length: 2.5 M
- Dimension: 41mm x 28.5mm/1.61*1.12 inches
- Weight: 54g

Board Overview

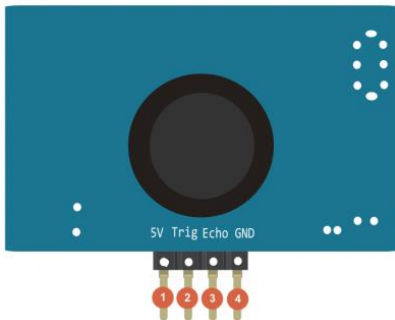


LABEL	NAME	FUNCTION
1	5V	Power Input +
2	Trig	Trigger Signal
3	Echo	Echo Signal
4	GND	GND

Tutorial

This tutorial will demonstrate how to use the Weather-proof Ultrasonic Sensor to measuring distance.

Fundamental Principles


A short ultrasonic pulse is transmitted at the time 0, reflected by an object. The sensor receives this signal and converts it to an electric signal. The next pulse can be transmitted when the echo fades. This time period is called cycle period. The recommend cycle period should be no less than 50ms. If a 10 μ s width trigger pulse is sent to the signal pin, the ultrasonic module will output eight 40kHz ultrasonic signals and detect the echo back. The measured distance is proportional to the echo pulse width and can be calculated by the formula above. If no obstacle is detected, the output pin will give a 38ms high level signal.

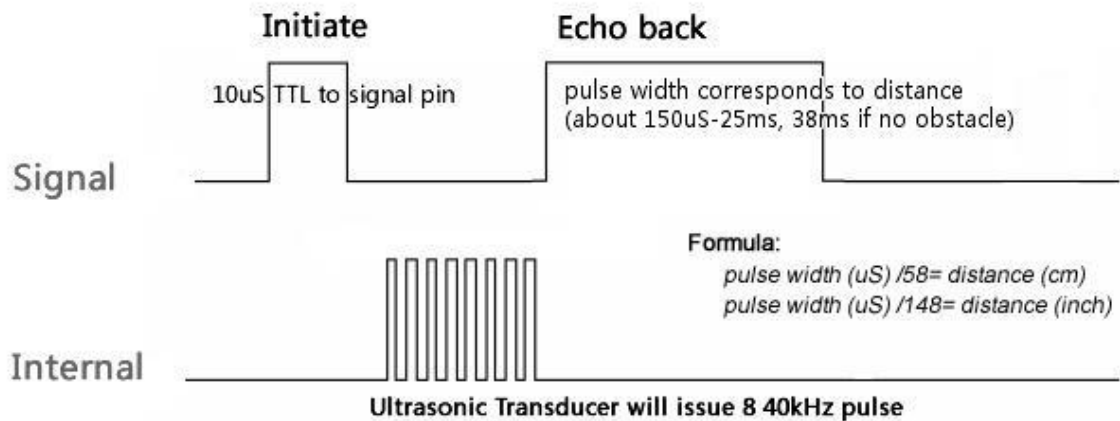

Requirements

- Hardware
- Arduino UNO x1
- Battery Capacity Indicator x1
- Software

Connection Diagram

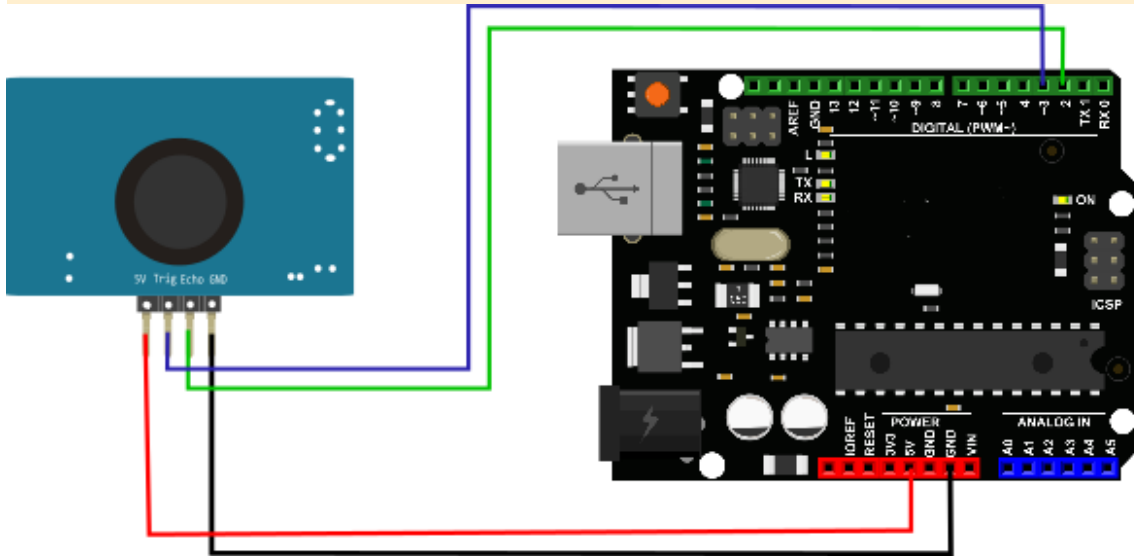

Sample Code

```
1 #define ECHOPIN 2 // Pin to receive echo pulse
2 #define TRIGPIN 3 // Pin to send trigger pulse
3 void setup() {
4   Serial.begin(9600);
5   pinMode(ECHOPIN, INPUT);
6   pinMode(TRIGPIN, OUTPUT);
7   digitalWrite(ECHOPIN, HIGH);
8 }
9 void loop() {
10  digitalWrite(TRIGPIN, LOW); // Set the trigger pin to low for 2uS
11  delayMicroseconds(2);
12  digitalWrite(TRIGPIN, HIGH); // Send a 10uS high to trigger ranging
13  delayMicroseconds(10);
14  digitalWrite(TRIGPIN, LOW); // Send pin low again
15  int distance = pulseIn(ECHOPIN, HIGH, 26000); // Read in times pulse
16  distance = distance / 58;
```

```
17 Serial.print(distance);  
18 Serial.println("  cm");  
19 delay(50); // Wait 50mS before next ranging  
20 }
```